

ENSIGN DRAIN

Double Branch 45°

ED010

DESCRIPTION

The double branch is designed to offer a double lateral branch off connection within a pipe system. This branch allows for the connection of four pipes/fittings, to facilitate a smooth directional change and efficient flow.


RECOMMENDED USE

- Domestic use
- Wastewater
- Rainwater
- Runoff water
- Hot effluents

STANDARDS & APPROVALS

- Industry product standard: BS EN 877
- Range fire classification: A2, s1, d0

IDENTIFICATION LABEL



MATERIALS & COATINGS

- Cast iron
- Internally and externally coated grey, powder epoxy resin coating, min. average thickness 150µm

TECHNICAL FEATURES


- Hot water resistance: 24hr @ 95°C
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C
- Chemical resistance for $1 \leq \text{pH} \leq 13$, up to 80°C
- Salt spray resistance internal coating: more than 3000h
- Salt spray resistance external coating: more than 1500h

ENVIRONMENTAL DATA

- Percentage of recycled content: 99%
- Recycling information: Cast iron is 100% recyclable through the existing recycling industrial network.

Data source: Environmental Product Declaration S-P-02191

ENSIGN DRAIN
Double Branch 45°
ED010

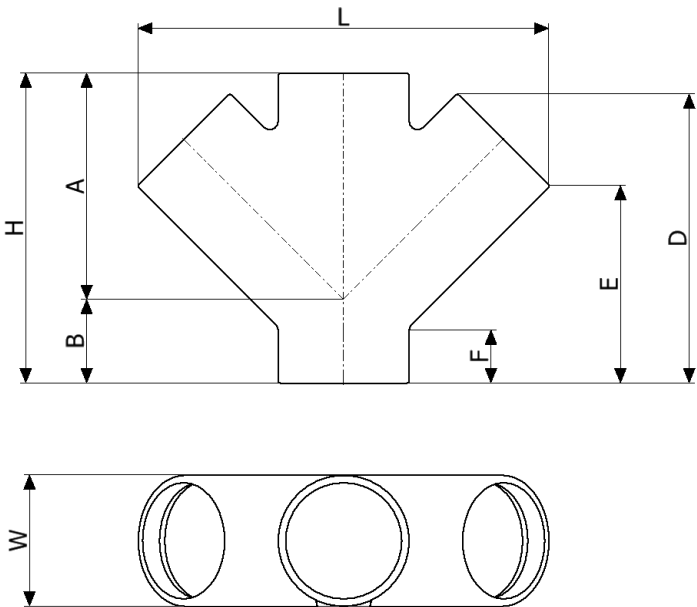

DN	L	H	W	A	B	C	D	E	F	WEIGHT (KG)	PRODUCT CODE
100X100	334	260	110	190	70	190	241	165	44	4.7	191798
150X100	392	280	160	225	55	225	251	175	54	8	191799
150X150	489	355	162	265	90	265	335	220	53	12.6	191800
200X200	627	455	210	340	115	340	428	281	67	25.3	191801

- Accessories**
→0.4l grey touch up paint – 216318
→Recommended couplings for connections - ED001/ED004/EC002HP
→For connection from Timesaver Drain to Ensign, please use the TD02 stepped coupling