

# ENSIGN DRAIN

## Plain P Trap

### ED034

#### DESCRIPTION

The P trap is designed to trap waste-water which prevents bad odours within a pipe system. The P trap is commonly used in a vertical to horizontal application. The support lug is designed into the product which allows ease of installation and additional support.


#### RECOMMENDED USE

- Domestic use
- Wastewater
- Rainwater
- Runoff water
- Hot effluents

#### STANDARDS & APPROVALS

- Industry product standard: BS EN 877
- Range fire classification: A2, s1, d0

#### IDENTIFICATION LABEL



#### MATERIALS & COATINGS

- Cast iron
- Internally and externally coated grey, powder epoxy resin coating, min. average thickness 150µm

#### TECHNICAL FEATURES

- Hot water resistance: 24hr @ 95°C
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C
- Chemical resistance for  $1 \leq \text{pH} \leq 13$ , up to 80°C
- Salt spray resistance internal coating: more than 3000h
- Salt spray resistance external coating: more than 1500h

#### ENVIRONMENTAL DATA

- Percentage of recycled content: 99%
- Recycling information: Cast iron is 100% recyclable through the existing recycling industrial network.


Data source: Environmental Product Declaration S-P-02191



# ENSIGN DRAIN

## Plain P Trap

ED034

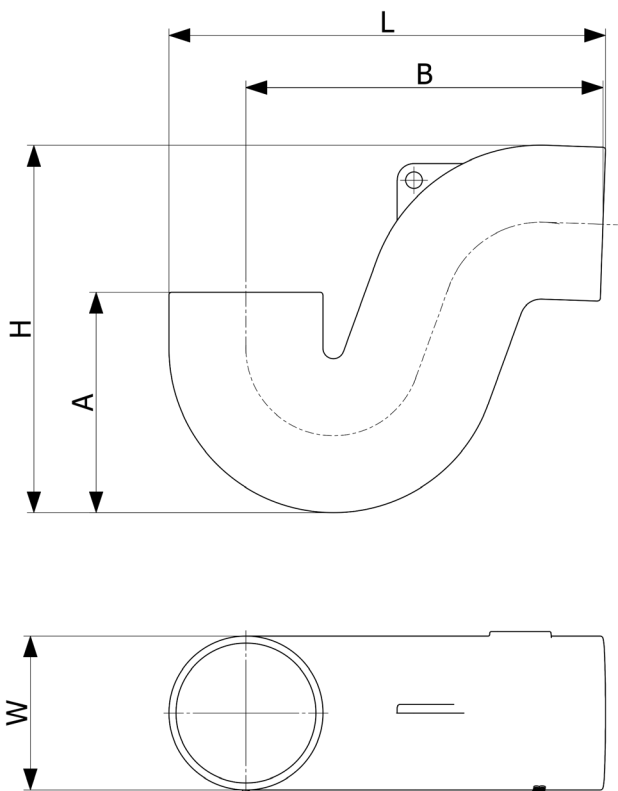

DN	L	H	W	A	B	WEIGHT (KG)	PRODUCT CODE
100	312	262	110	155	255	4.5	191815

**Accessories:**

- 0.4l grey touch up paint – 216318
- Recommended couplings for connections – ED001/ED004/EC002HP
- For connection from Timesaver Drain to Ensign, please use the TD02 stepped coupling

This document is provided for information purposes, and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility of materials that do not comply with the rules prescribed in this document as well with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Pam Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.