

## **ENSIGN SOIL**

# Long Radius Bend 22°

### EF<sub>02</sub>L

#### **DESCRIPTION**

The long radius bend is designed to offer a smooth transition of direction within a pipe system.

The long radius bend conforms to BS 12056-2 and can be used for soil, vent and rainwater systems.

#### **RECOMMENDED USE**

- Domestic use
- Wastewater
- Rainwater
- Runoff water
- Hot effluents

#### **STANDARDS & APPROVALS**

- Industry product standard: BS EN 877
- Range fire classification: A1

#### **IDENTIFICATION LABEL**





#### **MATERIALS & COATINGS**

- Cast Iron
- Internally and externally coated red-brown, anti-corrosive epoxy powder coating, average thickness 150  $\mu$ m internally and 70 $\mu$ m externally

#### **TECHNICAL FEATURES**

- Hot water resistance: 24hr @ 95°C
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C
- Chemical resistance for 2>ph>12
- Salt spray resistance internal coating: more than 350hrs.

#### **ENVIRONMENTAL DATA**

- Percentage of recycled content: 99%
- Recycling information: Cast Iron is 100% recyclable through the existing recycling industrial network.


Data source: Environmental Product Declaration S-P-02190



Long Radius Bend 22°

EFO2L



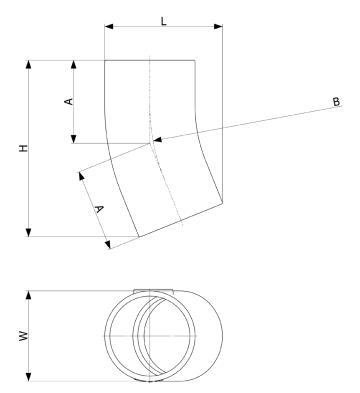

DN	L	н	w	A	В	WEIGHT (KG)	PRODUCT CODE
100	143	215	110	100	235	2.0	191548

This document is provided for information purposes, and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility of materials that do not comply with the rules prescribed in this document as well with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Pam Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.