

ENSIGN SOIL

Stench Trap

EF081

DESCRIPTION

The stench trap is designed to prevent bad odours emanating on balconies and flat roofs. The vertical trap is commonly installed on rainwater systems directly after the roof outlet.


RECOMMENDED USE

- Domestic use
- Rainwater
- Runoff water

STANDARDS & APPROVALS

- Industry product standard: BS EN 877
- Range fire classification: A1

IDENTIFICATION LABEL

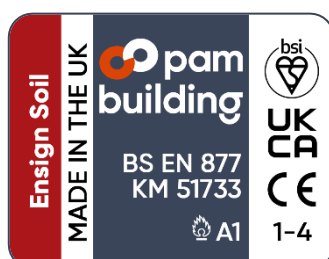

MATERIALS & COATINGS

- Cast Iron
- Internally and externally coated red-brown, anti-corrosive epoxy powder coating, average thickness 150 µm internally and 70µm externally

TECHNICAL FEATURES

- Hot water resistance: 24hr @ 95°C
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C
- Chemical resistance for 2>ph>12
- Salt spray resistance internal coating: more than 350hrs.

ENVIRONMENTAL DATA

- Percentage of recycled content: 99%
- Recycling information: Cast Iron is 100% recyclable through the existing recycling industrial network.

Data source: Environmental Product Declaration S-P-02190




pam

building

ENSIGN SOIL

Stench Trap

EF081

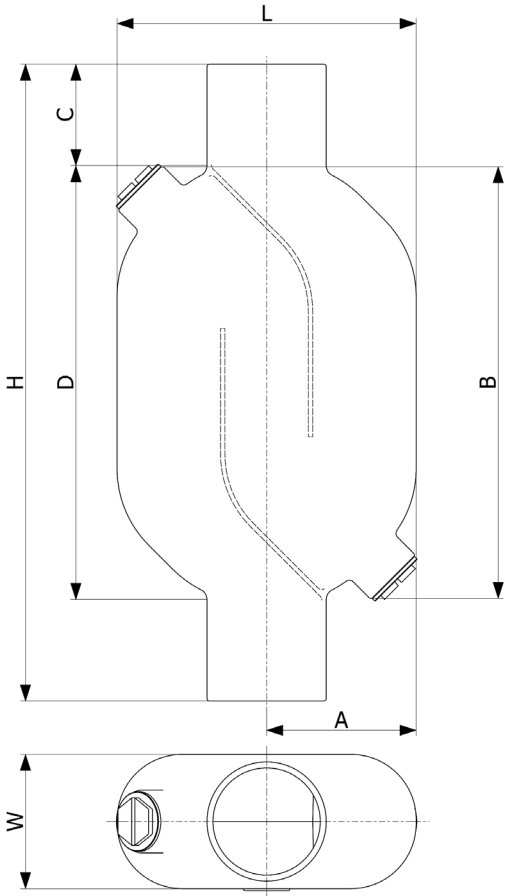

DN	L	H	W	A	B	C	WEIGHT (KG)	PRODUCT CODE
100	276	588	110	138	400	94	17.4	155841
150	374	742	160	187	522	110	38.0	155921

This document is provided for information purposes, and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility of materials that do not comply with the rules prescribed in this document as well with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Pam Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.