



THREADED ADAPTORS

VORTX ALUMINIUM

ROOF OUTLETS

VX-ADP-300

DESCRIPTION

The aluminium threaded adaptors are manufactured to fit the threaded roof outlet bodies.

The male BSPT thread simply threads into the female threaded bodies. PTFE is recommended to ensure a seal is achieved.

The standard length of the threaded adaptors is 300mm. These are used where extra length is required through roof penetration.

RECOMMENDED USE

- Domestic use
- Rainwater
- Runoff water
- Warm-roof installations

STANDARDS & APPROVALS

- Industry product standard: BS EN 1253-2
- Range fire classification: A2,s1,d0

PRODUCT IDENTIFICATION

- N/A

ENVIRONMENTAL DATA

- Recycling information: Aluminium is 100% recyclable through the existing recycling industrial network.

MATERIALS & COATINGS



- LM6 Aluminium Silicon alloy to BS EN 1706:2010
- BSPT tapered thread

THREADED ADAPTORS

VORTX ALUMINIUM

ROOF OUTLETS

VX-ADP-300

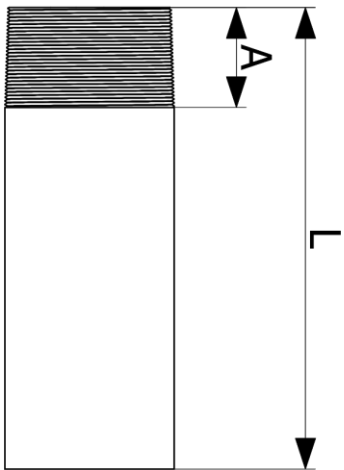

GEN CODE	DN	L	H	W	A	WEIGHT	PRODUCT CODE
VX-ADP2-300	Ø50	300	58	58	50	0.81	286075
VX-ADP3-300	Ø75	300	83	83	60	1.19	286074
VX-ADP4-300	Ø100	300	110	110	65	1.77	286073
VX-ADP6-300	Ø150	300	158	158	65	2.54	286072

This document is provided for information purposes and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility of materials that do not comply with the rules prescribed in this document as well with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of PAM Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.