



UNIVERSAL CONNECTOR ENSIGN SOIL EF071R

DESCRIPTION

The transitional connector is designed for connecting cast iron to other materials, whether it be steel or plastic. The connections with these flexible connectors are easy and safe: one pre-cut lid and a lip seal inside.


RECOMMENDED USE

- Domestic use
- Wastewater
- Rainwater
- Runoff water
- Hot effluents

STANDARDS & APPROVALS

- Industry product standard: BS EN 877
- Range fire classification: A1

IDENTIFICATION LABEL



MATERIALS & COATINGS

- EPDM rubber gasket
- Fixing: Chrome Steel Hose Clamp no: 1.4016

TECHNICAL FEATURES



- Hot water resistance: 24hr @ 95°C
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C
- Chemical resistance for $2 > \text{pH} > 12$

ENVIRONMENTAL DATA

- Percentage of recycled content: 99%
- Recycling information: Cast Iron is 100% recyclable through the existing recycling industrial network.

Data source: Environmental Product Declaration S-P-02190

UNIVERSAL CONNECTOR ENSIGN SOIL EF071R

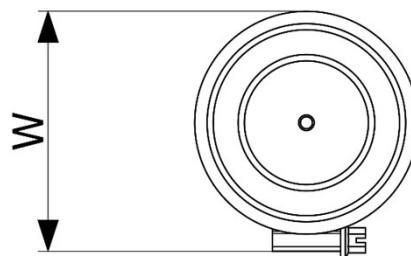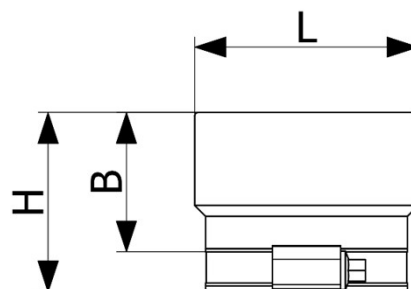

DN	L	H	W	B	WEIGHT (KG)	PRODUCT CODE
50	72	60	78	40	0.1	155759

- Accommodates 56/48/40 OD waste connections.

This document is provided for information purposes and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility of materials that do not comply with the rules prescribed in this document as well with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of PAM Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.