

ENSIGN DRAIN

3m Pipe

DESCRIPTION

The Ensign Drain double spigot pipe is manufactured to BS EN 877. Available in 3m lengths and is designed for use in below ground, basement and chemical applications.

External coating colour - RAL 7016

RECOMMENDED USE

- Domestic use
- Wastewater
- Rainwater
- Runoff water
- Hot effluents


STANDARDS & APPROVALS

- Industry product standard: BS EN 877
- Range fire classification: A2, s1, d0

IDENTIFICATION LABEL

Coatings:

- **External coating:** red-brown, anti-corrosive acrylic primer paint, average dry film thickness 40 µm.
- 2 Anti-corrosive layer: zinc coated to 130 g/m²
- 3 Cast-iron made with the De Lavaud process.
- 4 Internal coating: two-component ochre-coloured epoxy coating applied in two layers, average dry filmthickness of 250 μm.




TECHNICAL FEATURES

- Hot water resistance: 24hr @ 95°C
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C
- Chemical resistance for 1 ≤ pH ≤ 13, up to 80°C
- Salt spray resistance internal coating: more than 3000h
- Salt spray resistance external coating: more than 1500h

ENVIRONMENTAL DATA

- Percentage of recycled content: 99%
- Recycling information: Cast iron is 100% recyclable through the existing recycling industrial network.


Data source: Environmental Product Declaration S-P-02191

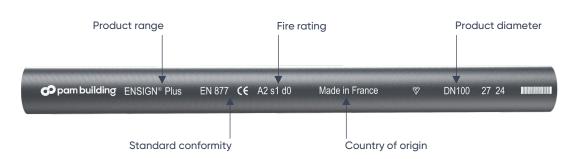





3m Pipe

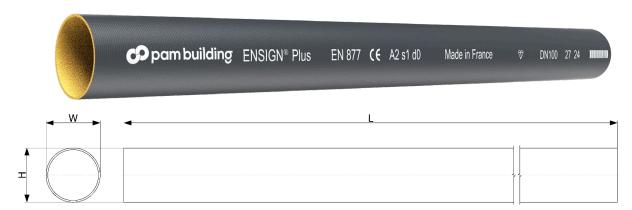

DN	LENGTH (M)	H&W/ (MAX OD)	MIN ID	MIN SECTION	WEIGHT (KG)	PRODUCT CODE
100	3	112	97.5	3	24.5	155349
150	3	162	146.25	3.5	41.0	155414
200	3	212	195	4	67.4	155448
250	3	276.5	243.75	4.5	97.3	155476
300	3	328.5	292.50	5	126.8	155493
400	3	431	390	5	177.7	155508
500	3	534	487.5	5.2	244.9	155511
600	3	637	585	5.8	321.9	175630

Accessories available:

- → Pipe caps available upon request
- \rightarrow 0.4l grey touch up paint 216318
- → Recommended couplings for connections ED001/ED004/EC002HP
- →For connection from Timesaver Drain to Ensign, please use the TD02 stepped coupling

This document is provided for information purposes, and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility of materials that do not comply with the rules prescribed in this document as well with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Pam Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.