

# ENSIGN SOIL

## Single Long Arm Branch 88°

### EF008

#### DESCRIPTION

The single long arm branch is ideal to use if space under the floor slab is limited. Due to its jointless design it halves the spacing required under the slab in comparison to a traditional installation.


#### RECOMMENDED USE

- Domestic use
- Wastewater
- Rainwater
- Runoff water
- Hot effluents

#### STANDARDS & APPROVALS

- Industry product standard: BS EN 877
- Range fire classification: A1

#### IDENTIFICATION LABEL



#### MATERIALS & COATINGS

- Cast Iron
- Internally and externally coated red-brown, anti-corrosive epoxy powder coating, average thickness 150 µm internally and 70µm externally

#### TECHNICAL FEATURES

- Hot water resistance: 24hr @ 95°C
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C
- Chemical resistance for 2>ph>12
- Salt spray resistance internal coating: more than 350hrs.

#### ENVIRONMENTAL DATA


- Percentage of recycled content: 99%
- Recycling information: Cast Iron is 100% recyclable through the existing recycling industrial network.

Data source: Environmental Product Declaration S-P-02190

**ENSIGN SOIL**

Single Long Arm  
Branch 88°

**EF008**

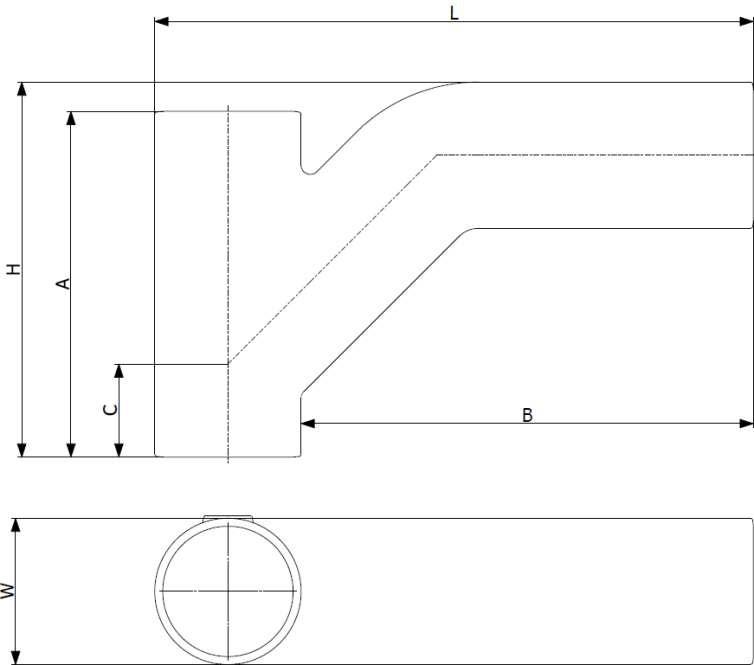

DN	L	H	W	A	B	C	WEIGHT (KG)	PRODUCT CODE
100x100	450	282	110	260	340	70	6.0	156726

This document is provided for information purposes, and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility of materials that do not comply with the rules prescribed in this document as well with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Pam Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.