

# ENSIGN SOIL

## Long Tail Branch 45°

### EF056

#### DESCRIPTION

The long tail branch is designed to replicate the single branches but with the bottom spigot offering a longer tail. This feature allows for a jointless connection should the branch need to penetrate through the slab.

#### RECOMMENDED USE

- Domestic use
- Wastewater
- Rainwater
- Runoff water
- Hot effluents

#### STANDARDS & APPROVALS

- Industry product standard: BS EN 877
- Range fire classification: A1

#### IDENTIFICATION LABEL



#### MATERIALS & COATINGS

- Cast Iron
- Internally and externally coated red-brown, anti-corrosive epoxy powder coating, average thickness 150 µm internally and 70 µm externally

#### TECHNICAL FEATURES

- Hot water resistance: 24hr @ 95°C
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C
- Chemical resistance for 2>ph>12
- Salt spray resistance internal coating: more than 350hrs.

#### ENVIRONMENTAL DATA


- Percentage of recycled content: 99%
- Recycling information: Cast Iron is 100% recyclable through the existing recycling industrial network.

Data source: Environmental Product Declaration S-P-02190

# ENSIGN SOIL

Long Tail  
Branch 45°

**EF056**

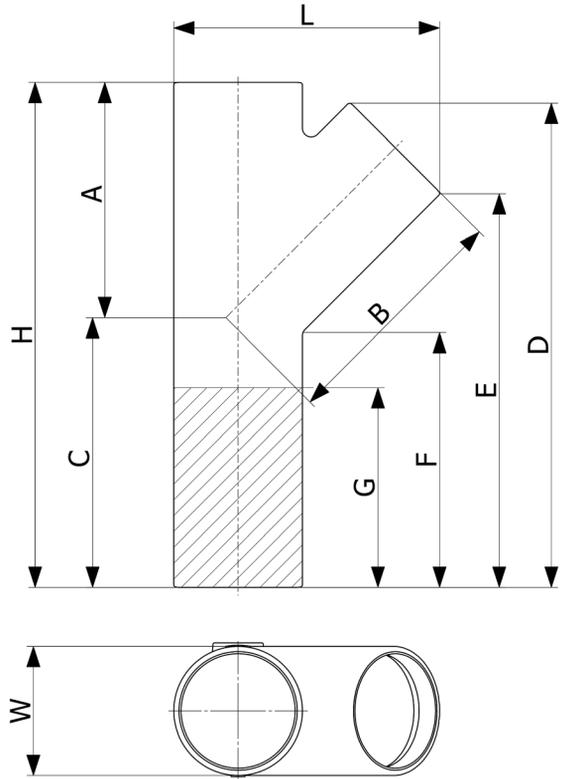

DN	L	H	W	A	B	C	D	E	F	G	WEIGHT (KG)	PRODUCT CODE
100x100	238	430	110	205	205	225	424	346	241	170	5.9	156723
150x150	323	705	110	265	265	440	684	571	403	350	18.3	156938

This document is provided for information purposes, and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility of materials that do not comply with the rules prescribed in this document as well with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Pam Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.