

ENSIGN SOIL

Pipe x 3m

EP000

DESCRIPTION

The Ensign Soil pipe is manufactured to BS EN 877.

Available in 3m lengths and is used for all soil, vent and rainwater applications.


RECOMMENDED USE

- Domestic use
- Wastewater
- Rainwater
- Runoff water
- Hot effluents

STANDARDS & APPROVALS


- Industry product standard: BS EN 877
- Range fire classification: A1

IDENTIFICATION LABEL

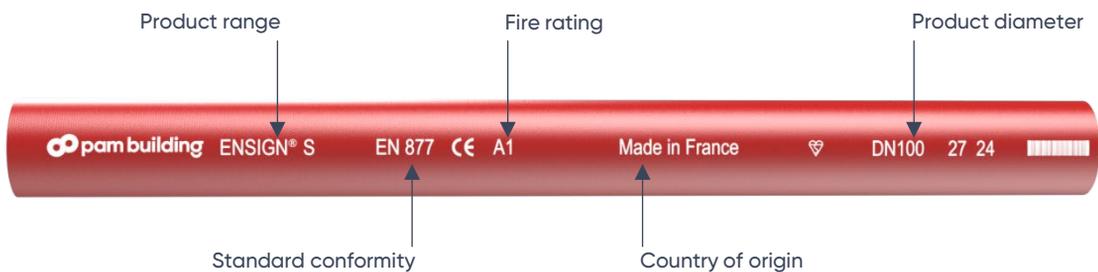

Coatings:

- 1 **External coating:** red-brown, anti-corrosive acrylic primer paint, average dry film thickness 40 µm.
- 2 Cast-iron made with the De Lavaud process.
- 3 **Internal coating:** two-component ochre-coloured epoxy coating, average dry film thickness of 130 µm.

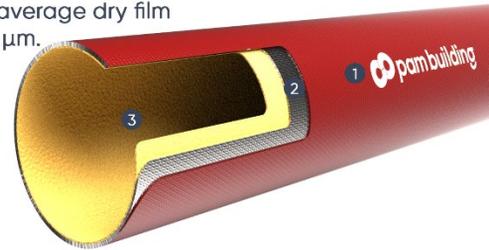

TECHNICAL FEATURES

- Hot water resistance: 24hr @ 95°C
- Thermal cycle resistance: 1500 cycles between 15°C and 93°C
- Chemical resistance for 2>ph>12
- Salt spray resistance internal coating: more than 350hrs.

ENVIRONMENTAL DATA

- Percentage of recycled content: 99%
- Recycling information: Cast Iron is 100% recyclable through the existing recycling industrial network.

Data source: Environmental Product Declaration S-P-02190

ENSIGN SOIL

Pipe x 3m

EP000



DN	L Metre Lengths Available	H&W/ (MAX OD)	MIN ID	MIN SECTION	WEIGHT (KG)	PRODUCT CODE
50	3	60	47.5	3	12.5	156363
70	3	80	68.25	3	18.3	156455
400	3	431	390	5	177.7	157171
500	3	534	487.5	5.2	244.9	157187
600	3	637	585	5.8	321.9	157203

Accessories available:

- Pipe caps available upon request
- 0.5L Touch up Paint – 226962 (2 Part)
- 0.4L Red Paint – 216317

This document is provided for information purposes, and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility of materials that do not comply with the rules prescribed in this document as well with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Pam Building and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.